

Tree Survey Schedule

Site: Sladburys Lane

Date of Survey: 12/12/2024

Arboricultural Consultant/Surveyor: J Choat

Weather: Overcast / drizzle

Tree ref	Species Common and Scientific	Height in m	Stem diameter in mm	Radial distance required for RPA	Branch spread				Height of crown clearance in m	Age class	Ground condition	Water demand	Observations	Preliminary management recommendations	Works urgency	Estimated remaining contribution in years	Category grading
					N	E	S	W									
H1	Hawthorn Crataegus monogyna	2	150	1.8	1	1	1	1	0	EM	Bare soil	High	Maintained with flail cut.	Maintain to current height and spread in accordance with hedgerow management regs 2024	3	30	B1/2/3
T1	Oak Quercus robur	12	700	8.4	6	6	6	6	2	M	Bare soil	High	Rooted within dense hedgerow, unable to fully assess. Rooted below overhead services. Occasional deadwood throughout crown	None	0	30	A1/2/3
T2	Oak Quercus robur	12	400	4.8	6	6	6	6	2	Y	Bare soil	High	Rooted within dense hedgerow, unable to fully assess. Rooted below overhead services. Low crown break.	None	0	30	A1/2/3
T3	Oak Quercus robur	12	350	4.2	6	6	6	6	2	Y	Bare soil	High	Rooted within dense hedgerow, unable to fully assess. Rooted below overhead services. Low crown break	None	0	30	A1/2/3
G1	Oak Quercus robur	12	300	3.6	6	6	6	6	2	Y	Bare soil	High	Group of 5 closely planted trees. Rooted within dense hedgerow, unable to fully assess. Rooted below overhead services. Could possibly be a lapsed coppice tree and the stems buried with removed soil from previous ditch management.	None	0	30	B1/2/3
T4	Oak Quercus robur	12	1000	12	6	6	6	6	1	M	Bare soil	High	3rd party tree, unable to fully assess. Large wound at base. Stem forks at 1m to form 2 codominant stems, tensile union.	None	0	30	A1/2/3
T5	Oak Quercus robur	18	1320	19.8	8	8	8	8	4	M	Bare soil	High	.Lapsed pollard with high historical pruning point at 4m. Low epicormic shoots to 4m. Occasional small decay pockets at 4m with sapwood exposed, some with cavities evident. Occasional deadwood throughout crown. Torn laterals at 8m north and south sides. Veteran tree due to size of stem diameter (over 1m) and decay characteristics and natural tear wounds within crown.	Remove torn laterals but retain tear wounds for wildlife purposes. Leave all removed material on ground adjacent tree.	3	30	A1/2/3
T6	Hawthorn Crataegus monogyna	3	400	4.8	2	2	2	2	1	M	Bare soil	High	Crown has died back, new dense lower crown formed. Decay within stem. Retain for wildlife.	None	0	20	C1

T7	Oak Quercus robur	17	690	8.28	6	4	5	5	1	M	Bare soil	High	Low epicormic growth to 3m. Cavity east side at base, Bulges on stem to 4m. Occasional deadwood within crown.	None	0	30	A1/2/3
H2	Blackthorn Prunus spinosa	3	200	2.4	2	2	2	2	0	EM	Bare soil	Varies	Blackthorn, Hawthorn, Bramble. Thick scrubby hedgerow clad in bramble.	Maintain to current height and spread in accordance with hedgerow management regs 2024	0	20	B1/2/3
T8	Field Maple Acer campestre	4	500	6	3	3	3	3	1	M	Bare soil	Moderate	Lapsed coppice, significant number of coppice stems. Ivy clad.	None	0	20	B1/2/3

Explanatory Notes

Referencing

Each tree is given a unique reference number and plotted on the attached plans for clear identity. Individual trees are referenced as T1, T2 etc., Groups G1, G2 etc. Hedgerows H1, H2 etc. and Woodlands W1, W2 etc.

Species

All species are recorded using common names. Identification is made using experience and knowledge.

Tree dimensions

Tree height is measured and recorded in meters and taken from the base of the stem to the tip of the crown. Height is estimated using experience and knowledge.

Diameter at Breast Height (DBH) is measured at approximately 1.5m from the ground up the stem and is measured and recorded in millimeters. DBH is measured accurately using a diameter tape.

Crown spread is measured in meters from the stem to the extent of the crown spread to each compass point (NESW). Crown spread is estimated using experience and knowledge.

Crown clearance is the height from ground level to the lowest branch and is measured in meters. Crown clearance is estimated using experience and knowledge.

Age class

Age class falls in to 4 categories:

Y	Young
EM	Early Mature
M	Mature
OM	Over Mature

Observations

The biological condition of the tree is assessed and noted. Notable defects are recorded; fruiting bodies, cankers, die back, exudates, etc. are recorded.

The mechanics of the tree are assessed and noted. Notable defects are recorded; buckling, rib formation, stresses, bulges, soil cracks, large cavities or wounds, tight branch junctions, etc. are recorded.

Preliminary management recommendations

Tree management is recommended following the assessment of physiological and structural condition. Recommended works may include, no work required, crown reduction, crown lift, fell, crown thin, monitor etc.

Estimated remaining contribution in years

An estimate of remaining life expectancy recorded in years. Estimated remaining contribution is made using experience considering the structural and physiological condition of the tree, nuisance, previous management, etc.

Category grading and colour coding on plan

A (Green square) high quality and value

B (Blue square) moderate quality and value

C (Grey square) low quality and value


U (Red Square) those that cannot be retained as living trees

Sub categories

- 1 arboricultural values
- 2 landscape values
- 3 cultural values, including conservation


Works priority

- 1 Works required immediately to make the tree safe
- 2 Works required within 60 days
- 3 Works required as part of routine operations
- 0 no works required

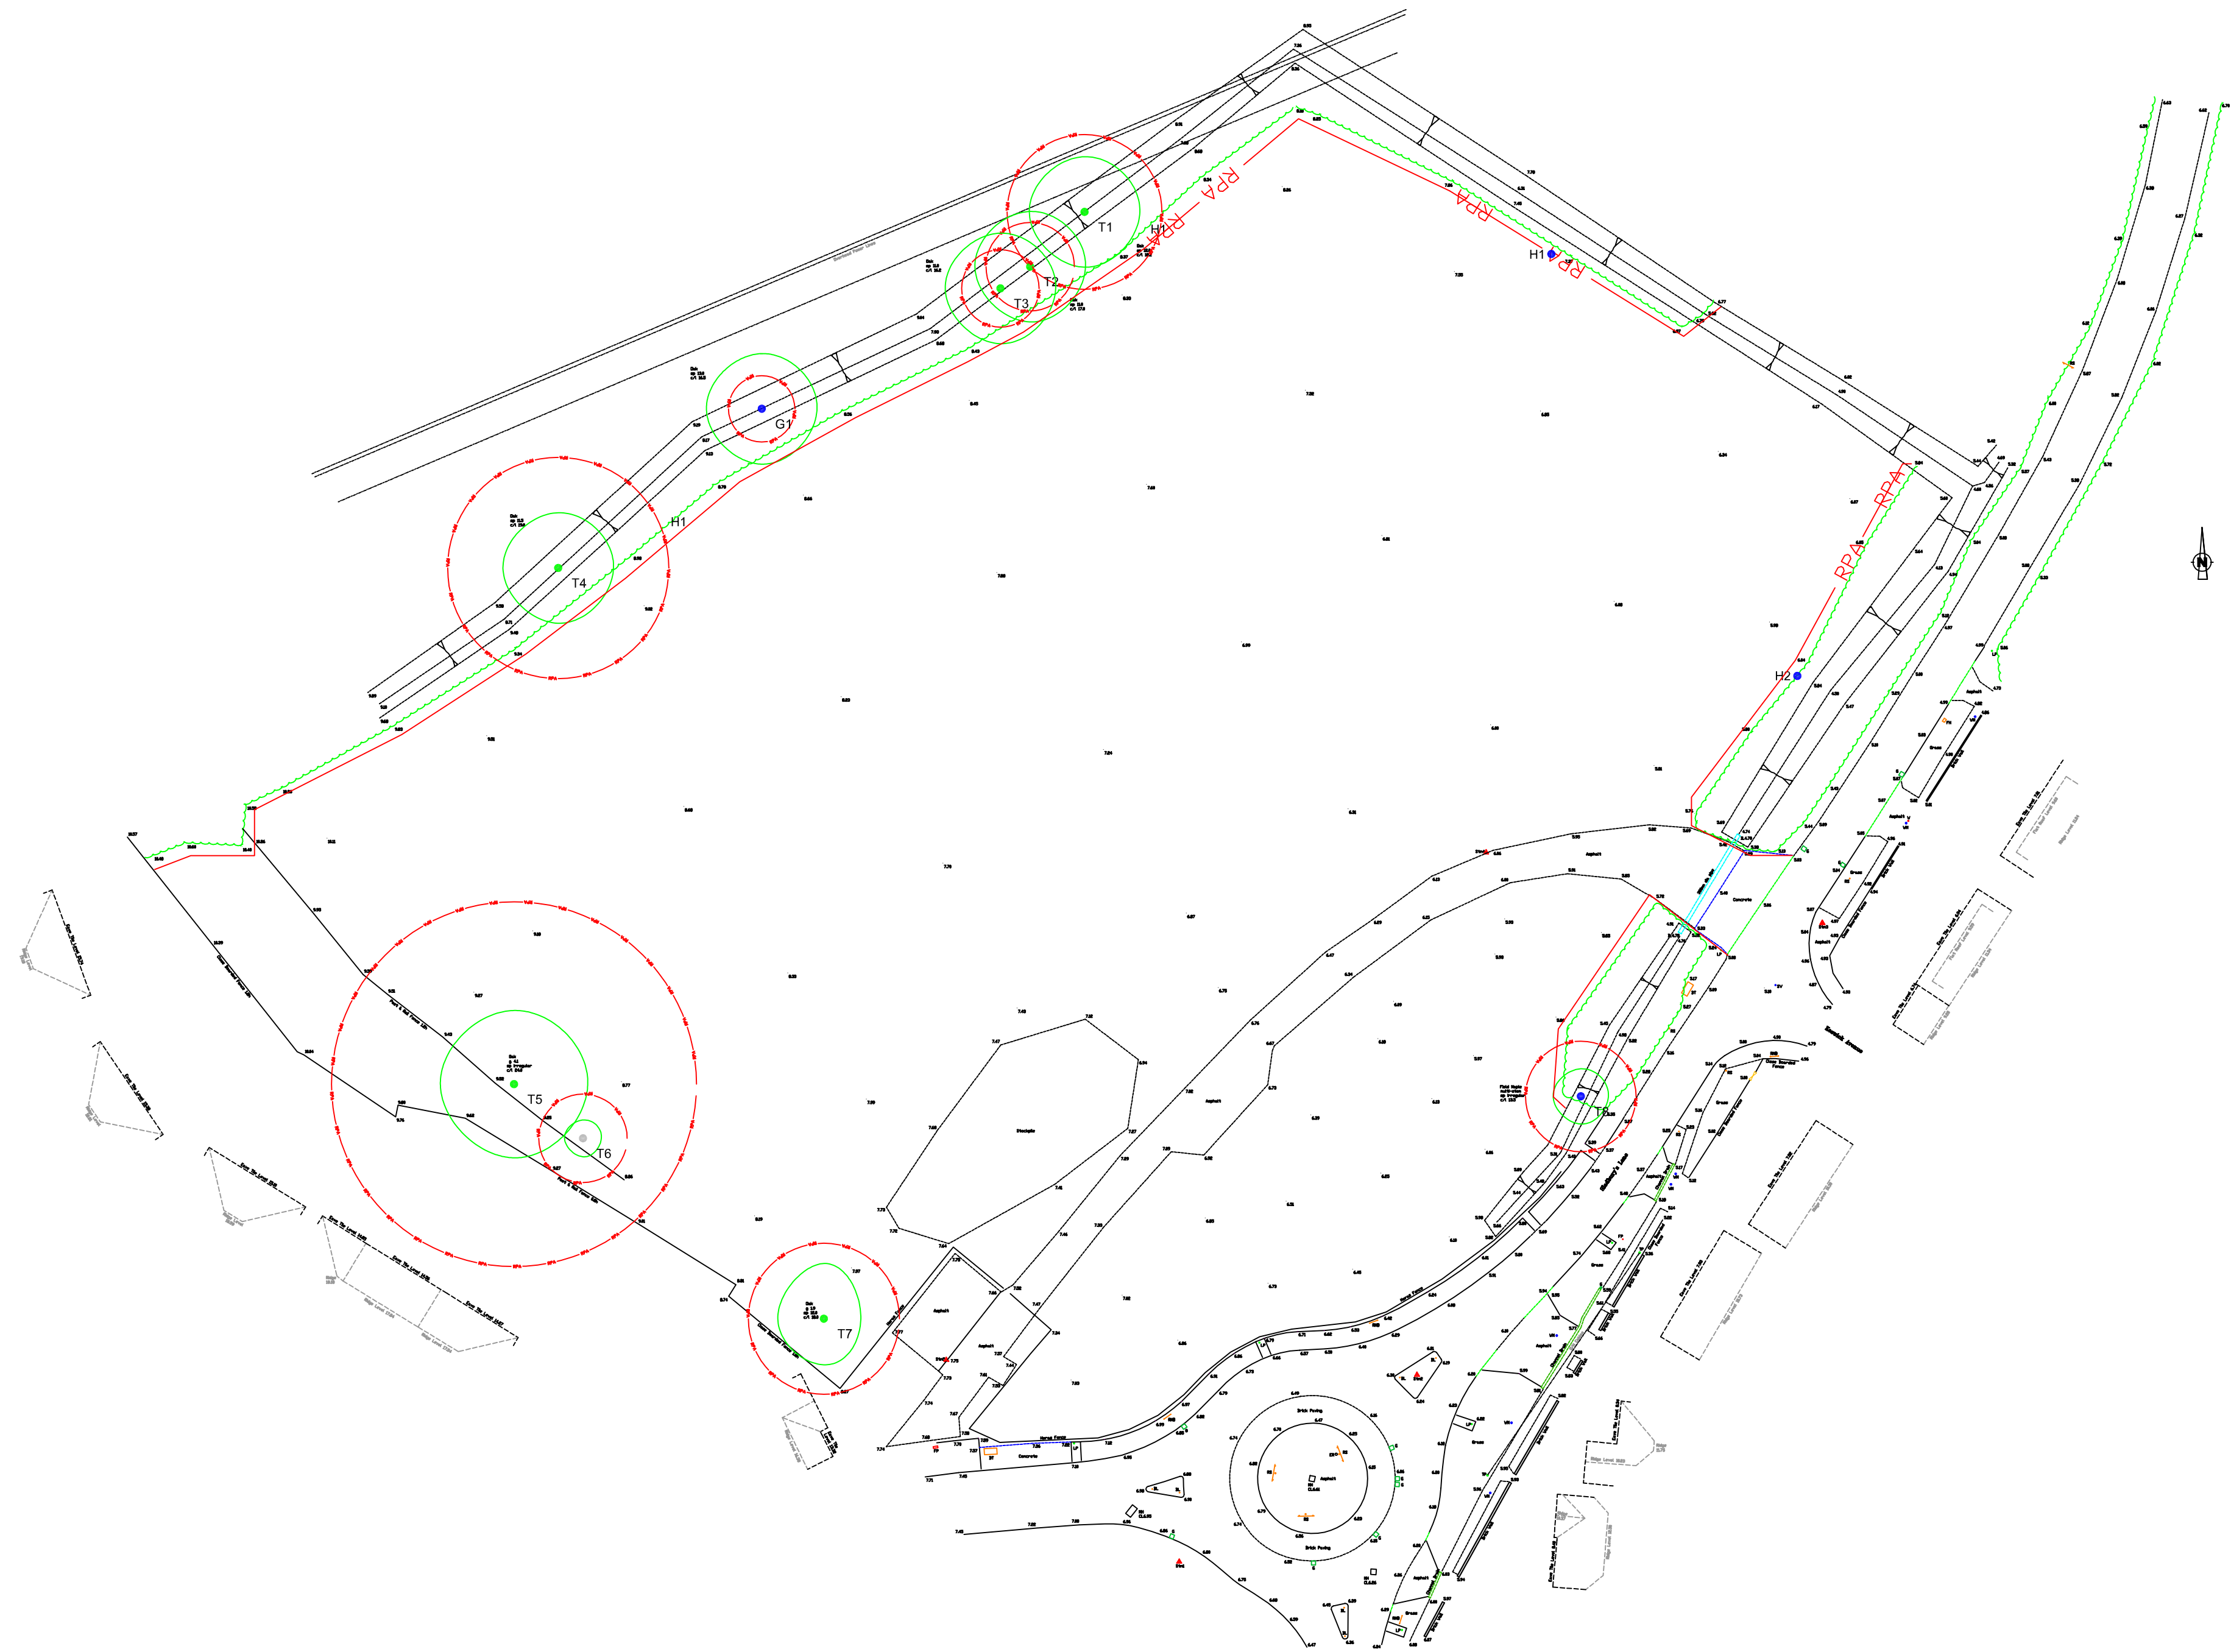


Legend:

Tree reference




Tree and crown spread




Root protection area




BS 5837 Retention Category A




BS 5837 Retention Category B



BS 5837 Retention Category C



BS 5837 Retention Category U



Notes:

This drawing was produced in colour; a monochrome copy should not be relied upon.

Project:

Sladburys Lane, Holland On Sea

Drawing Title:

Tree Survey and Constraints Plan

TPS

Arboricultural Consultancy

25 Frietuna Road
Frinton On Sea
Essex
CO130QP

Date: 12th December 2024

Scale: 1:500 @ A1

Drawing Number: TPSQU0102 TS CP